
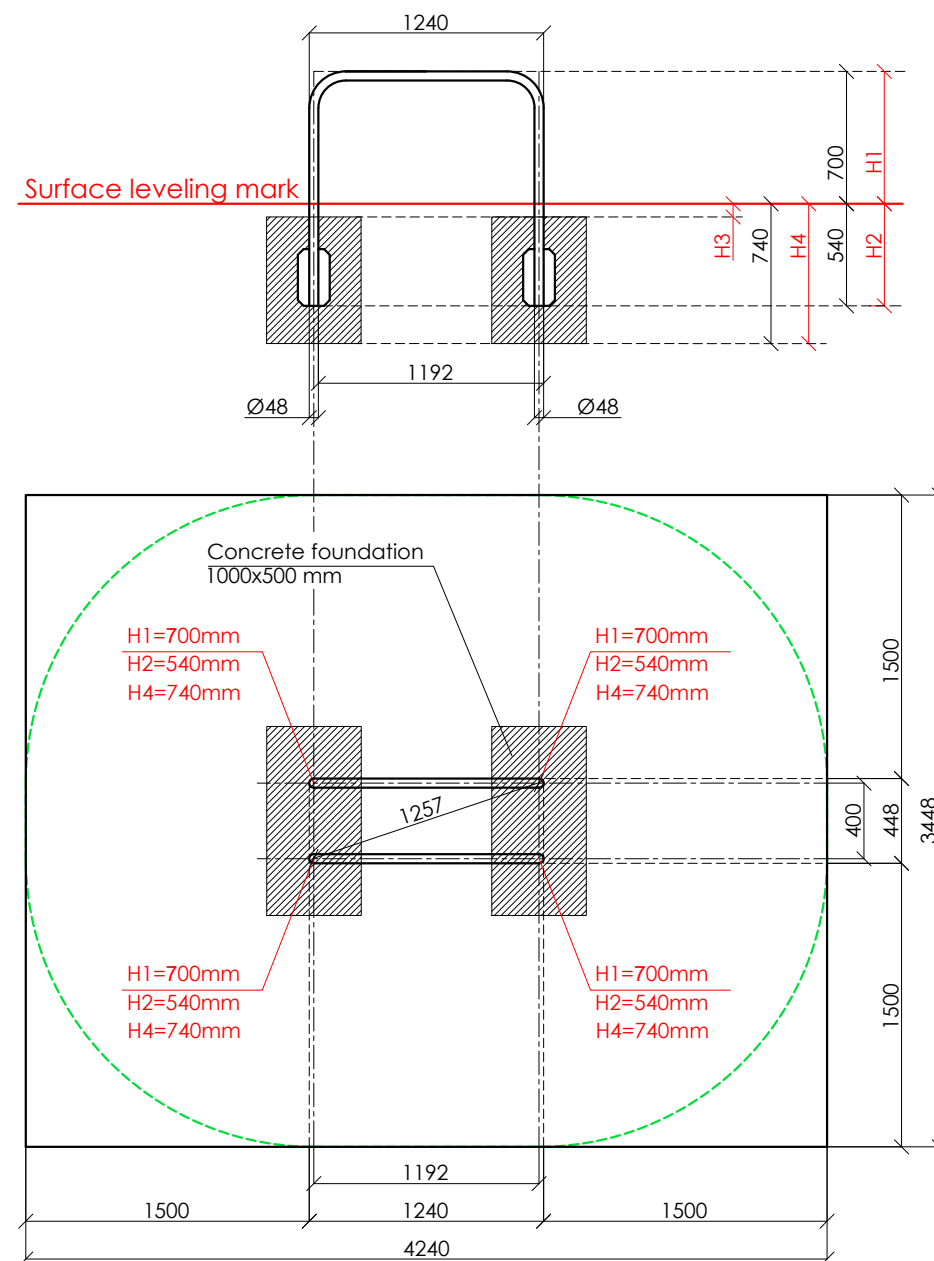


SCALE 1:40



**KENGURU
PRO**

"KENGURU PRO" LTD

Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-008_kids

Low parallel bars



The structure consists of two low, curved parallel bars. Length of the bars 1240 mm, height – 700 mm, distance between the bars – 400 mm.

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-008_kids

Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material	
H3	Drop height	H3	Drop height
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m
70 mm	> 2.1.....2.5 m		

Technical information

width:	448 mm
height:	700 mm
length:	1240 mm
largest part:	1340 mm
weight:	40,00 kg
floor space required	3448 x 4240 mm
pipe measurements:	diameter: 48 mm wall thickness: 3.2 mm
metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
metal clamps:	siluminium, powder coated, RAL 4010 (Telemagenta)
bolts for metal clamps	stainless steel, Pin Hex Button Head Security bolts M10
max. free fall height:	< 700 mm
user age:	3-14 years
certificates:	EN1176-1 annex I table I.1

