
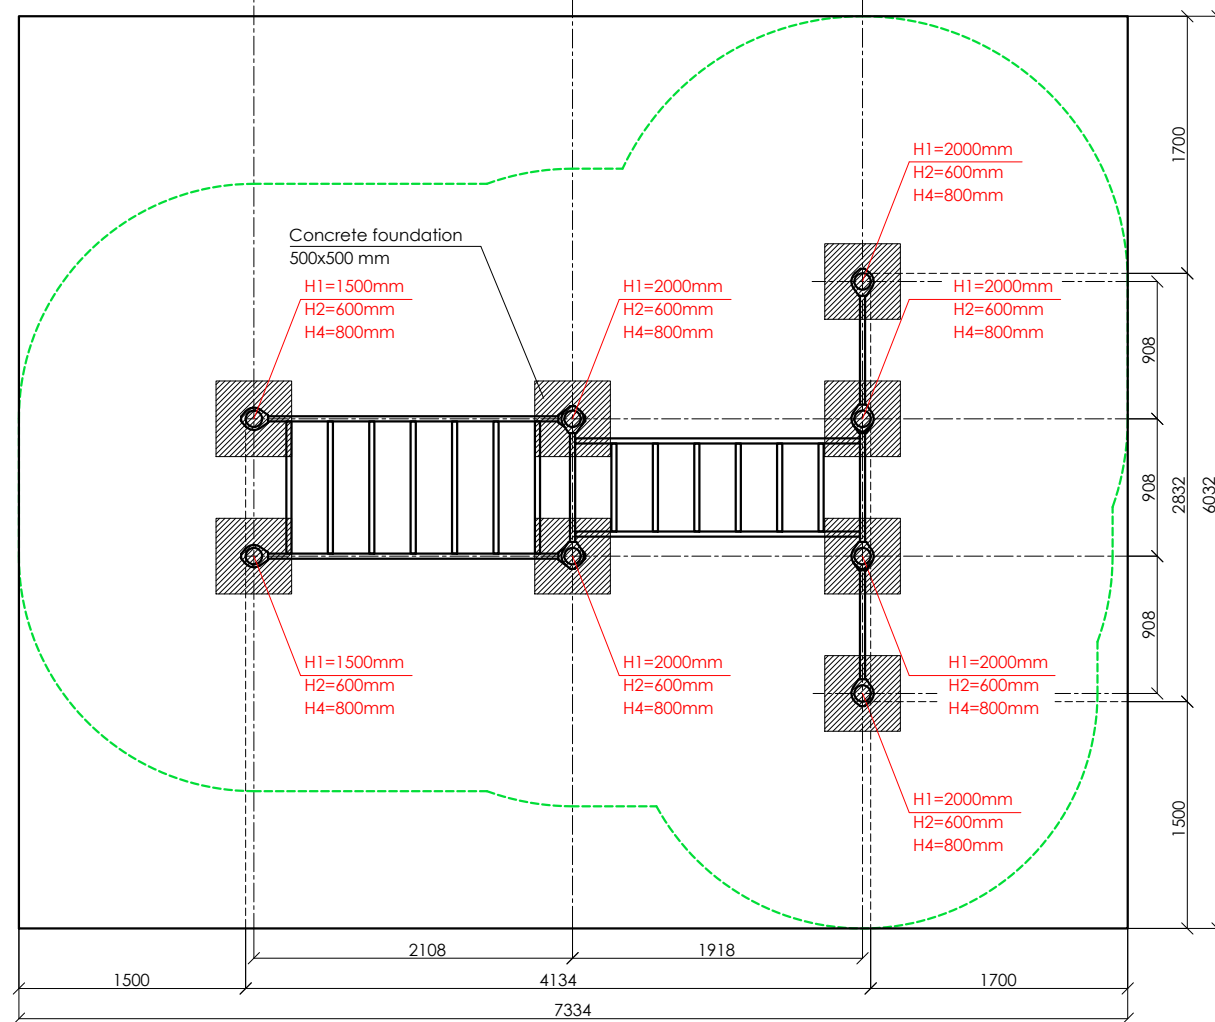


SCALE 1:50

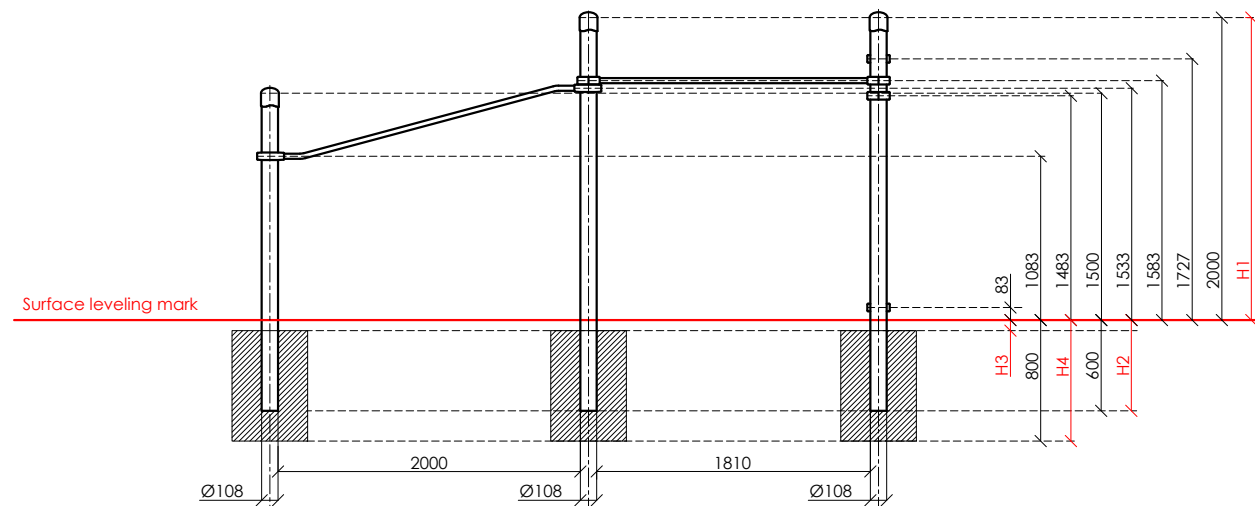


**KENGURU
PRO**

"KENGURU PRO" LTD

Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S Luminor bank, SWIFT: RIKOLV2X,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-036_kids

Vizhas

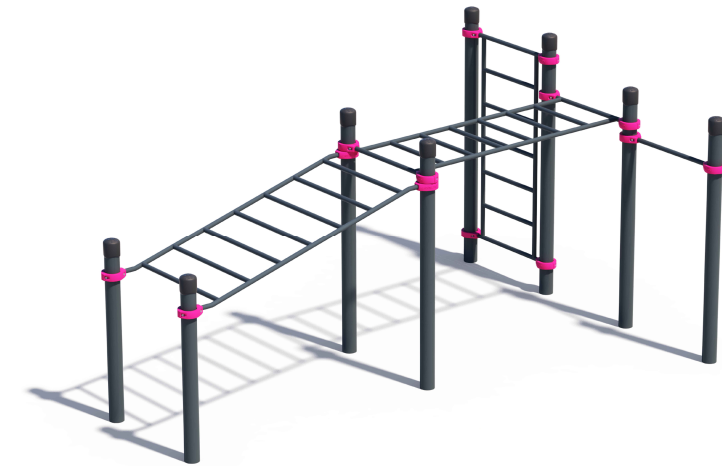

The complex consists of eight vertical columns of different heights, a crossbar 800 mm in length, a horizontal monkey bar, an inclined monkey bar and a Swedish wall. The horizontal monkey bar is 1952 mm in length and the inclined monkey bar – 2000 mm. Width of the classic monkey bars is 800 mm, distance between each crossbar is 274 mm. Width of the inclined monkey bar is 942 mm, distance between each crossbar is 274 mm. Height of the Swedish wall is 1678 mm, width – 800 mm, distance between each crossbar is 274 mm. The complex is secured together with siluminium clamps.

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-036_kids

Technical information

| | | | | | |
|---|--|--|--|---|--|
| Foundation when using Shock absorbing underground (synthetic – rubber granulates) | | Beveling of foundation when using loose filling material | | width: 2832 mm | |
| | | | | height: 2050 mm | |
| | | | | length: 4134 mm | |
| | | | | largest part: 2650 mm | |
| | | | | weight: 275,00 kg | |
| | | | | floor space required: 7334 x 6032 mm | |
| | | | | pipe measurements: diameter: wall thickness: | |
| | | | | 108 mm 3.2 mm | |
| | | | | 33.7mm 3.2 mm | |
| | | | | metal parts: steel, galvanized, powder coated RAL 7016 (anthracite grey) | |
| | | | | metal clamps: siluminium, powder coated, RAL 4010 (Telemagenta) | |
| | | | | bolts for metal clamps: stainless steel, Pin Hex Button Head Security bolts M10 | |
| | | | | max. free fall height: < 1727 mm EN1176-1 annex I table I.1 | |
| | | | | user age: 3-14 years | |
| | | | | certificates: | |

